


The Apus highbay is a durable range of industrial luminaires. Manufactured from die-cast aluminium, sealed to IP65 with an impact rating of IK10, Apus is tough enough for the most challenging of environments. The gear housing is also set away from the LED compartment for improved thermal management. Wide and narrow optics are available, and efficiency is an impressive 160 lumens per Watt. Apus has a 50,000 hour service life and comes with a 7 year warranty (5 years on non DALI options)

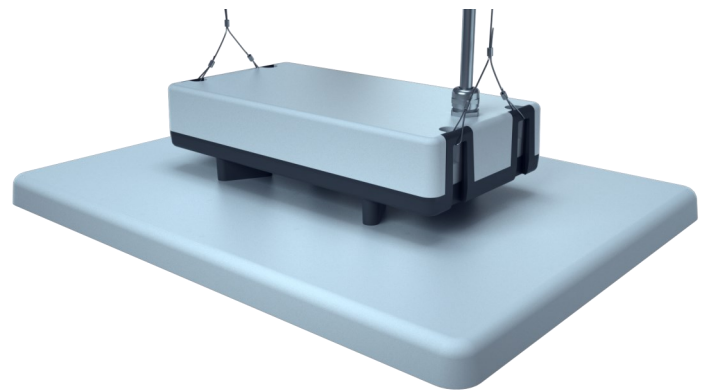

Key features

- Operating temperature (range): -40° to +50°C
- 160 lumens/Watt
- Warranty 7 Years (5 Years on non DALI options)
- L90 50,000 hours
- CRI: >80
- Colour temperature 4000K
- Sealed to IP65
- Impact rating IK10

Order Guide

Code	Power (W)	Luminaire Lumens	CCT (K)	Weight (kg)	Optic	Dimensions (mm)		
						Length	Width	Height
AP/161040/AR	100	15800	4000	4.1	Area optic 90°	362	257	120
AP/161040/NA	100	16000	4000	4.1	Narrow optic 60°	362	257	120
AP/241540/AR	150	24300	4000	6.2	Area optic 90°	487	362	120
AP/241540/NA	150	24500	4000	6.2	Narrow optic 60°	487	362	120
AP/322040/AR	200	31100	4000	6.2	Area optic 90°	487	362	120
AP/322040/NA	200	31500	4000	6.2	Narrow optic 60°	487	362	120

Options

Code Suffix	Description
.../DL15A	Dimming sensor, max 15m mounting height
.../DD	DALI driver
.../DL20D	DALI sensor, max 20m mounting height
.../LTS	LiteSense enabled