


Luminaire Data Sheet

MaxLine

Industrial luminaire for warehouse and logistics applications
 Aluminium body, high efficiency lenses
 Wide, medium and rack optics available
 Options with integral emergency
 Options with integral control



- 50,000 hrs to L70
- CCT 4000K
- CRI > 80
- IP20, IK06
- SDCM < 3
- Power Factor > 0.9
- Operating Temp -20°C - 40°C
- Insulation Class I
- 8 year warranty, including emergency

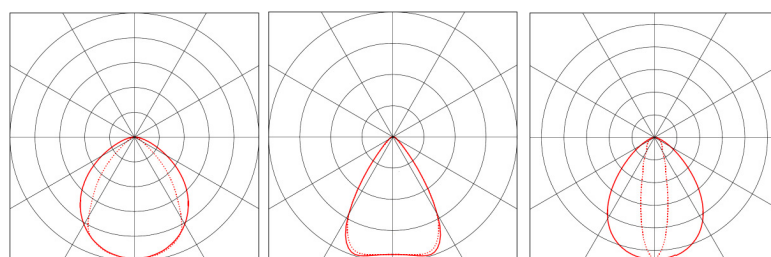

Wide 90 optic

Medium 60 optic

Rack HR optic



Code	Description	Luminaire Lumens	Luminaire Lumens Emergency	Inrush Current	Current (A)	Qty Type C 10A breaker	Dimensions L x W x H (mm)	Weight (kg)
ML4/160940/90	MaxLine 4, 230V, 90W	16623	1052	3.8A / 1500µs	0.39	8	1225 x 110 x 60	2.3
ML4/191040/90	MaxLine 4, 230V, 105W	18900	1026	3.8A / 1500µs	0.46	7	1225 x 110 x 60	2.3
ML4/211240/90	MaxLine 4, 230V, 117W	20844	1015	3.8A / 1500µs	0.51	6	1225 x 110 x 60	2.3
ML5/211140/90	MaxLine 5, 230V, 112W	20778	1057	3.8A / 1500µs	0.49	6	1525 x 110 x 60	2.9
ML5/231340/90	MaxLine 5, 230V, 131W	23626	1028	3.7A / 1800µs	0.57	5	1525 x 110 x 60	2.9
ML5/261440/90	MaxLine 5, 230V, 147W	26054	1010	3.7A / 1800µs	0.64	5	1525 x 110 x 60	2.9
ML5/261440/90	MaxLine 5, 230V, 164W	28640	995	3.7A / 1800µs	0.71	4	1525 x 110 x 60	2.9