

Luminaire Data Sheet


Rubix Surface



Rubix is a flexible range of linear luminaires designed to add a touch of style to any office or commercial space. Combining low-profile enclosures with microprism diffusers, Rubix offers a simple and clean finished look. Cutting edge LED technology achieves impressive efficacy up to 150 lumens per Watt, and the microprism diffuser ensures a comfortable, low glare output. Rubix comes with a 100,000 hour service life backed by a 5 year warranty



- 100,000 hrs to L80/B10
- CCT 3000K
- CRI > 80
- IP44 / IK05
- Insulation Class I
- Up to 150 lumens per Watt
- Operating Temperature - ta 0...+35°C
- 5 year warranty

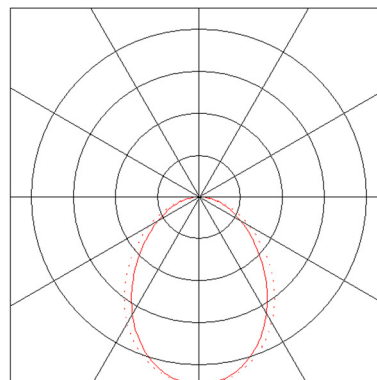

Code	Description	Luminaire Lumens	Luminaire Lumens (Emergency)	Inrush Current	Current (A)	Qty / Type C 10A breaker	Dimensions L x W x H (mm)	Weight (kg)
RX12S/352640WH/MP	26W Surface Linear	3534	387	6.1A/ 18µs	0.11	29	1203 x 175 x 47	3.9
RX12S/503640WH/MP	36W Surface Linear	5051	399	5.5A/ 20µs	0.16	21	1203 x 175 x 47	3.9
RX12S/574340WH/MP	43W Surface Linear	5785	383	15A/ 100µs	0.19	18	1203 x 175 x 47	3.9
RX15S/443240WH/MP	32W Surface Linear	4418	393	5.5A/ 20µs	0.14	24	1483 x 175 x 47	4.8
RX15S/634540WH/MP	45W Surface Linear	6313	418	15A/ 100µs	0.20	17	1483 x 175 x 47	4.8
RX15S/725340WH/MP	53W Surface Linear	7231	388	15A/ 100µs	0.23	14	1483 x 175 x 47	4.8